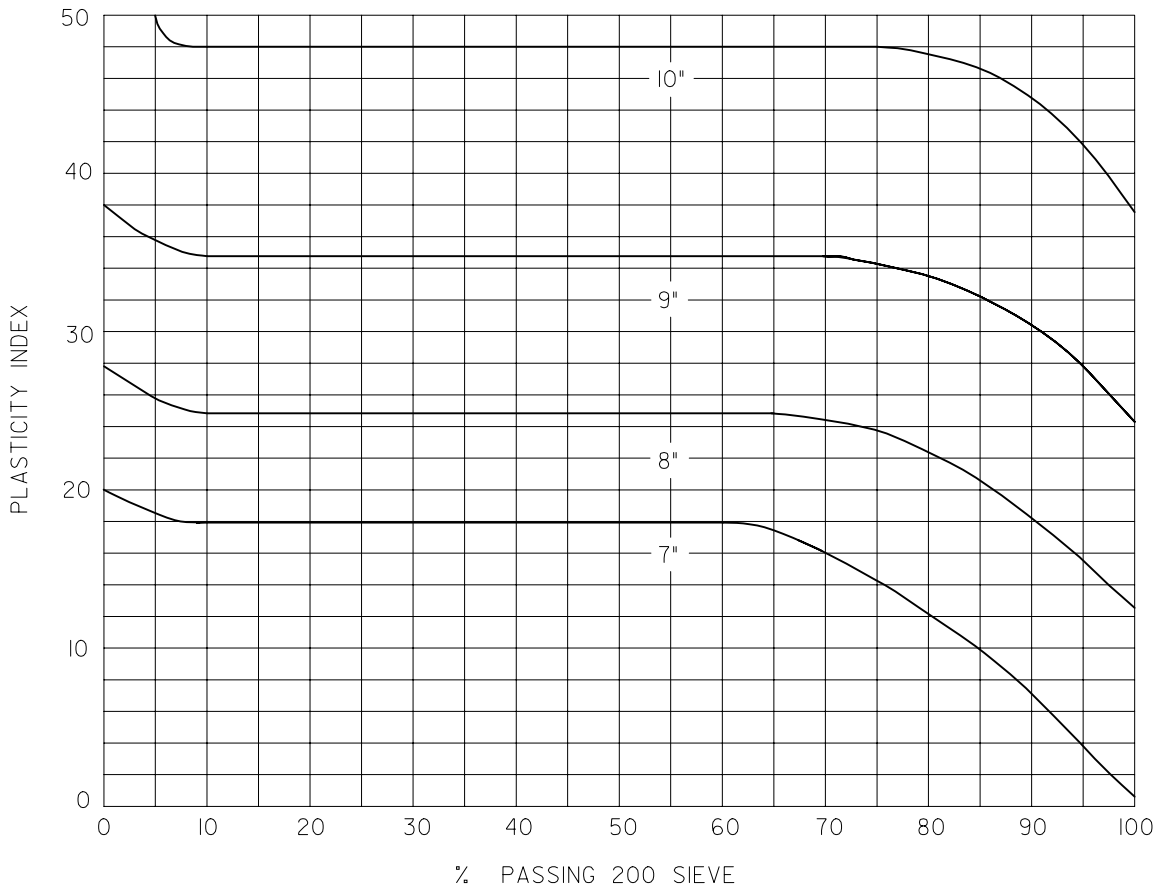

NOTES:

1. TOP 4" OF BASE SHALL BE A.B.C. BALANCE SHALL BE A.B.C. OR SELECT MATERIAL. MINIMUM-THICKNESS OF LIFT SHALL BE 4".
2. MINIMUM-DEPTH OF FLEXIBLE BASE COURSE REQUIRED UNDER 2" (MIN.) BITUMINOUS SURFACE.

APPROVED: ORIGINAL SIGNATURE ON FILE AT THE CITY OF TEMPE

CITY ENGINEER DATE

CITY OF TEMPE PUBLIC WORKS DEPARTMENT	DEPTH OF BASE COURSE L-1 STREETS	DETAIL T-303 REVISED 1998