TRENCHES TRANSVERSE TO TRAFFIC

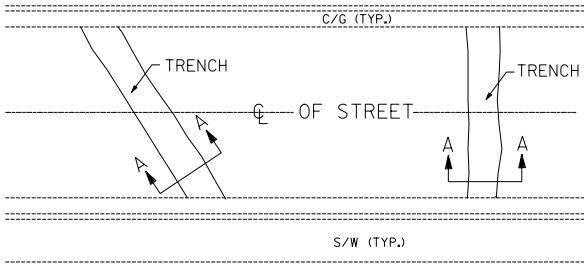

TRENCHES PARALLEL TO TRAFFIC *

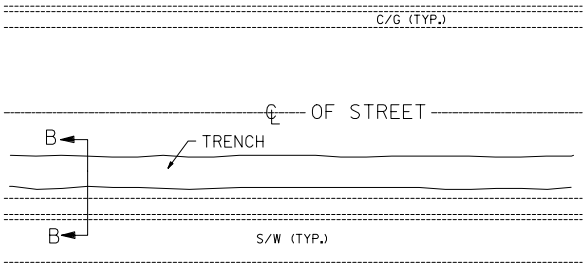

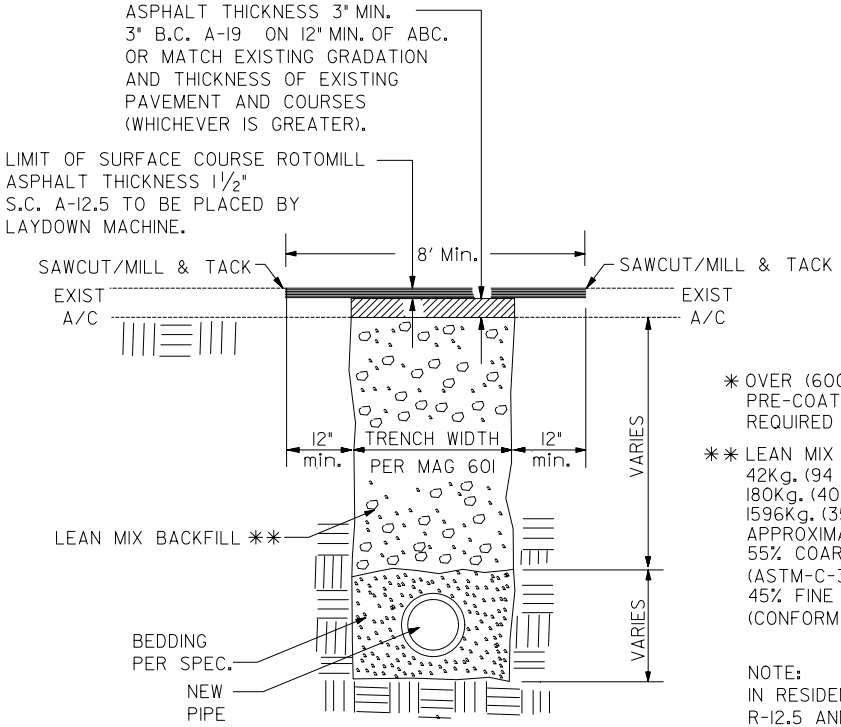

TRANSVERSE TYPICAL BACKFILL SECTION A-A

* OVER (600') LENGTH
PRE-COATED CHIP SEAL
REQUIRED SECTION 336.

** LEAN MIX BACKFILL: PER YD. QNTY.
42Kg. (94 Lbs.) - PORTLAND CEMENT
180Kg. (400 Lbs.) - WATER
1596Kg. (3547 Lbs.) - ABC
APPROXIMATE PROPORTIONS OF:
55% COARSE AGGREGATE
(ASTM-C-33 SIZE 57)
45% FINE AGGREGATE
(CONFORM TO SEC. 701.3)

NOTE:
IN RESIDENTIAL STREETS
R-12.5 AND R-19 SHALL BE
USED IN PLACE OF
A-12.5 AND A-19

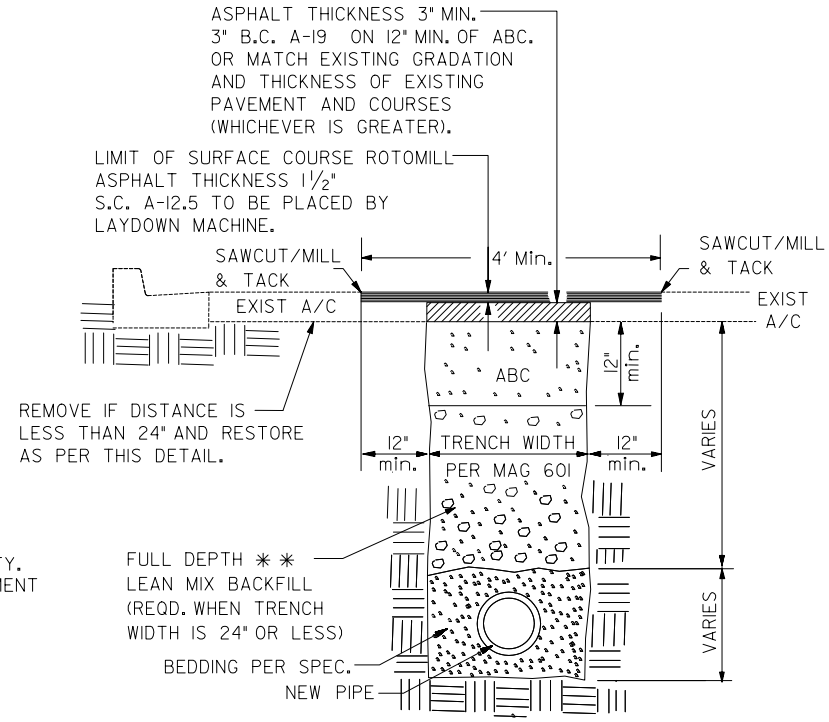

PARALLEL TYPICAL BACKFILL SECTION B-B

ORIGINAL SIGNATURE ON FILE
AT THE CITY OF TEMPE

APPROVED: _____ CITY ENGINEER _____ DATE

CITY OF TEMPE PUBLIC WORKS DEPARTMENT	TRENCH BACKFILL AND PAVEMENT REPLACEMENT	DETAIL T-450 REVISED 2000