


ANCHOR BOLT LAYOUT PLAN

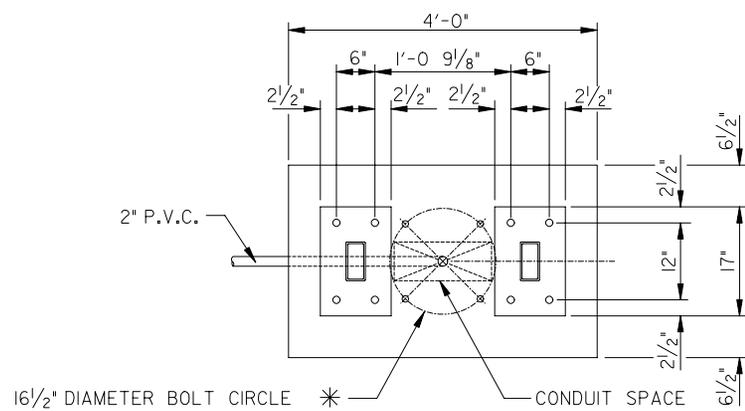

BASE PLATE LAYOUT PLAN

* BOLTS FOR INTERIM SIGNAL ERECTION
MAY BE DELETED AT ENGINEER'S DIRECTION.

GENERAL NOTES

1. CONCRETE 4000 P.S.I. @ 28 DAYS
2. REBAR GRADE 60
3. ANCHOR BOLTS A-36 FULLY GALVANIZED
4. EXISTING SOIL CONDITIONS TO BE DETERMINED PRIOR TO FINAL FOUNDATION DESIGN.
5. A 25' COIL OF NO. 4 STRANDED A.W.G. BARE COPPER CONDUCTOR SHALL BE INSTALLED BEFORE THE CONCRETE IS POURED.
6. ADDITIONAL 2" P.V.C. CONDUIT MAY BE REQUIRED FOR LOOPS, SEE SIGNAL PLAN.

APPROVED: _____ DATE _____
 DEPUTY PUBLIC WORKS MANAGER
 TRANSPORTATION

APPROVED: _____ DATE _____
 DEPUTY PUBLIC WORKS MANAGER
 CITY ENGINEER

ORIGINAL SIGNATURE ON FILE
AT THE CITY OF TEMPE