

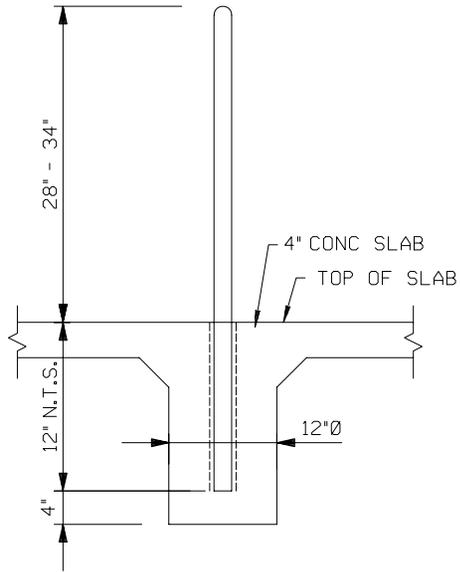


NOTE: ALTERNATIVE METHOD OF ANCHORING BIKE RACK IS SHOWN BELOW.



BICYCLE RACK CONNECTION DETAIL

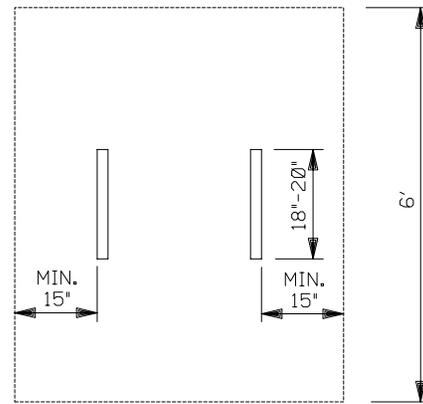

PREFERRED METHOD OF ANCHORING BIKE RACK IS TO ORDER BIKE RACK WITH STEEL FLANGE & RAMSET BOLTS TO CONCRETE SLAB PER MANUFATURER'S INSTRUCTIONS.

BICYCLE RACK

NOTE:

1. MAINTAIN 6' LONG USABLE SPACE FOR BICYCLE.
2. MAINTAIN 30" BETWEEN EACH RACK.
3. MAINTAIN 15" CLEAR DISTANCE BEYOND RACK.

APPROVED: \_\_\_\_\_ DATE \_\_\_\_\_  
 DEPUTY PUBLIC WORKS MANAGER  
 CITY ENGINEER

APPROVED: \_\_\_\_\_ DATE \_\_\_\_\_  
 TRAFFIC ENGINEER