


BASE PLATE SECTION

BASE PLATE SECTION WITH BRICK

FOUNDATION NOTES

1. 3000 P.S.I. CLASS A CONCRETE PLACED NEXT TO UNDISTURBED EARTH.
2. 4 - 3/4" x 24" GALVANIZED ANCHOR BOLTS (3" PROJECTION) WITH LEVELING NUTS & WASHERS.
3. BRICKS ARE TO BE INSTALLED AFTER BASE AND CONDUIT ARE INSTALLED.
4. UNSTABLE SOILS, AND/OR POLE HEIGHTS CHANGE, SHALL REQUIRE SPECIAL ENGINEERING.
5. A 25' COIL OF NO. 4 A.W.G. BARE COPPER CONDUCTOR SHALL BE CONNECTED TO POLE GROUNDING SCREW IN THE BASE OF THE POLE.
6. ALL FINISHED POLE FOUNDATIONS SHALL BE CHAMFERED, AND AT SIDEWALK GRADE UNLESS OTHERWISE NOTED.
7. TOP OF BASE SHALL BE LEVEL AND ELEVATION OF TOP OF BASE SHALL EQUAL TOP OF CURB.
8. POLES ARE TO BE INSTALLED AFTER BRICKS HAVE BEEN LAID AROUND ANCHOR BOLTS AND CONDUIT.
9. TOP OF BASE SHALL BE LEVEL. BRICK LAYERS SHALL MAINTAIN LEVEL AREA OVER BASE.
10. INSTALL NEW RUNNING BOND PATTERN TO MATCH EXISTING, OR PER DETAIL T-353.
11. 1/2" THICK EMBECO GROUT #636 OR APPROVED EQUAL.

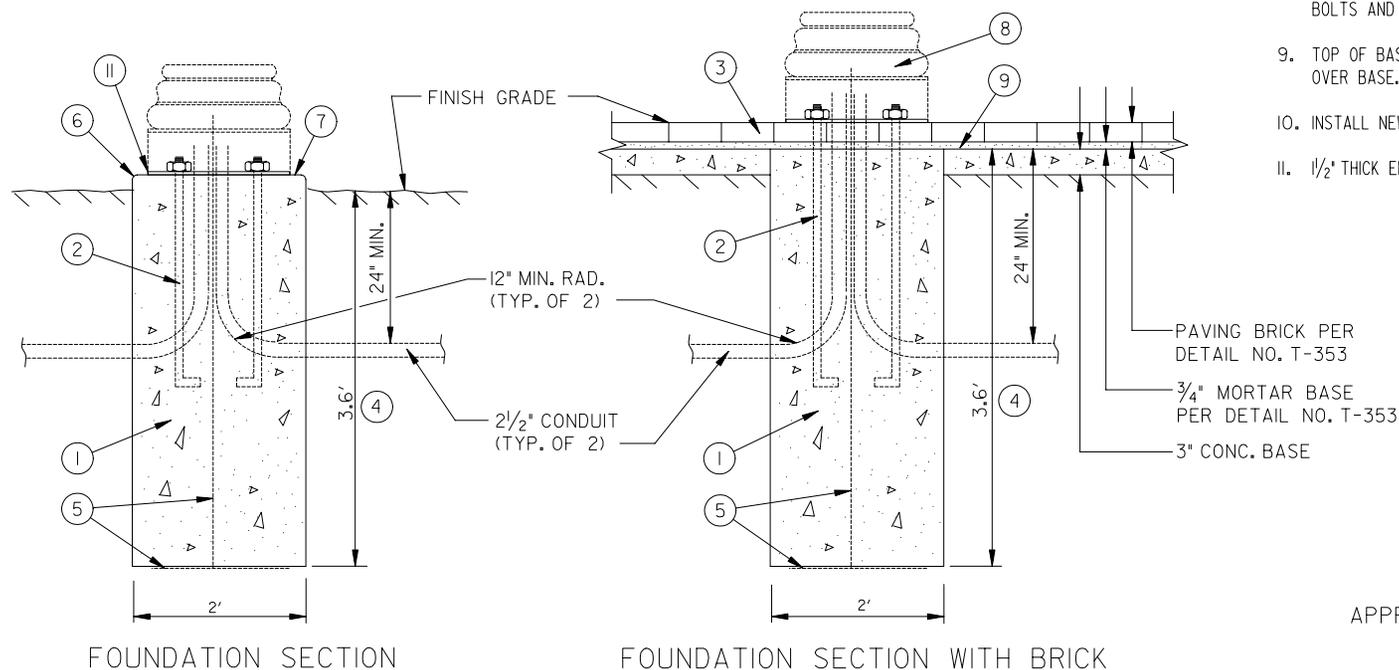

FOUNDATION SECTION

FOUNDATION SECTION WITH BRICK

PAVING BRICK PER
DETAIL NO. T-353
3/4" MORTAR BASE
PER DETAIL NO. T-353
3" CONC. BASE

ORIGINAL SIGNATURE ON FILE
AT THE CITY OF TEMPE

APPROVED: _____
DEPUTY PUBLIC WORKS DIRECTOR DATE

APPROVED: _____
CITY ENGINEER DATE