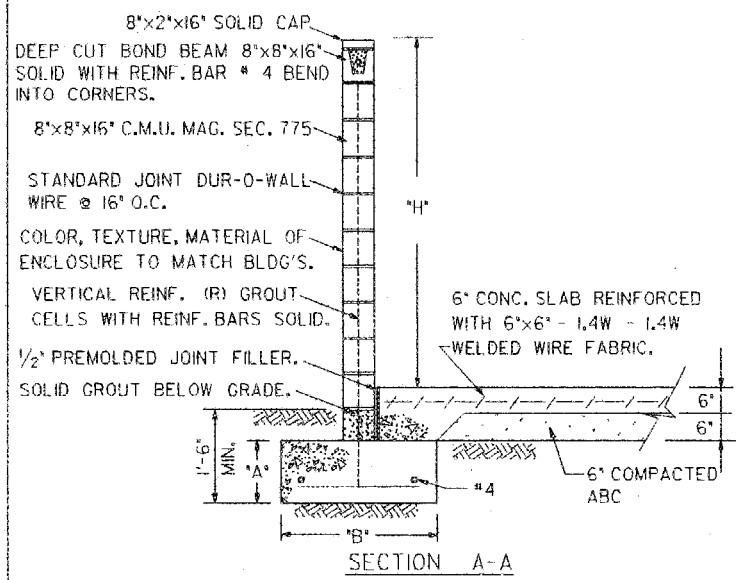

SECTION A-A

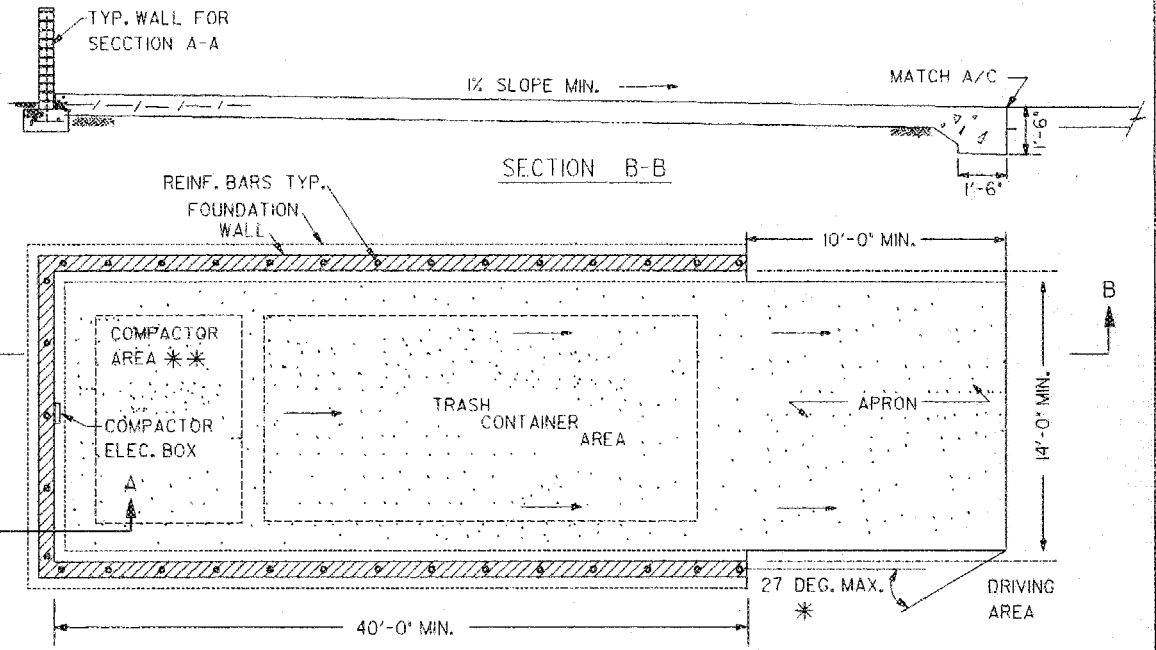

LARGE COMPACTOR ENCLOSURE

TABLE # 1

"H"	"A"	"B"	"R"	
6'-0"	12"	24"	#4 @ 48"	
7'-0"	12"	24"	#5 @ 48"	
8'-0"	12"	24"	#5 @ 48"	
9'-0"	12"	28"	#6 @ 48"	
10'-0"	12"	30"	#6 @ 48	

NOTES:

-CONSTRUCT ENCLOSURE PER M.A.G. SECTION 510.

-ALL INTERIOR PAD DIMENSIONS ARE MINIMUMS.

-WALL HEIGHT DETERMINED BY COMPACTOR HEIGHT (6'-0" MIN.)

✳ -FINAL LOCATION & ORIENTATION TO BE DETERMINED BY THE CITY.

✳✳ -PROVIDE PEDESTRIAN ACCESS TO THIS AREA (THRU WALL)

-CONCRETE f'_c =3,000 psi

-REINFORCING f_y =60,000 psi

f_s =24,000 psi

-MASONRY f_m =1,500 psi

PROPER CLEANING METHODS ARE TO BE USED TO PREVENT THE DISCHARGE OF WASH WATER INTO PUBLIC STORM DRAIN SYSTEM. PLEASE CONTACT THE CITY OF TEMPE ENVIRONMENTAL DIVISION AT 480-350-2678 FOR A LIST OF BEST MANAGEMENT PRACTICES THAT WILL HELP YOUR FACILITY COMPLY WITH ENVIRONMENTAL REGULATIONS.

CITY OF TEMPE DEVELOPMENT SERVICES DEPARTMENT	LARGE COMPACTOR REFUSE AREA	DETAIL DS-118 REVISED 2005

o:\microstation\ds118_2.dgn Mar. 24, 2005 15:11:30 City of Tempe - Do not reproduce